


TRUSS **KRATOWNICE**

Main tube/ Rura główna **50x3mm**

Braces/ lamelka **20x2mm**

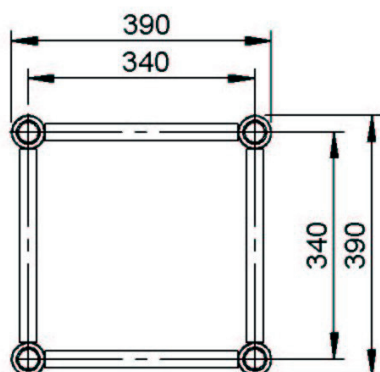


Truss
kratownica


Product Code Length Weight
Kod produktu długość waga




ALHD44050 **0,5m** **5,1**
kg




ALHD44100 **1,0m** **8,3**
kg




ALHD44150 **1,5m** **12,1**
kg




ALHD44200 **2,0m** **15,6**
kg




ALHD44250 **2,5m** **19,1**
kg



ALHD44300 **3,0m** **22,0**
kg



ALHD44350 **3,5m** **25,1**
kg



ALHD44400 **4,0m** **28,3**
kg

Load chart
according static calculation

Alustage Q 390

Partial factors

Self weight 1,35

User loads 1,5

User loads

Span	Uniformly Distributed load		Centre Point load		Third Point load		Quarter Point load		5th Point load	
Stützweite	Gleichlast		Mittige Punktlast		Last in Drittelpunkten		Last in Viertelpunkten		Last in Fünftelpunkten	
m	kg/m	mm	kg	mm	kg (2x)	mm	kg (3x)	mm	kg (4x)	mm
2	1371,0	0,8	2742,0	1,2	1371,0	1,1	914,0	1,0	685,5	0,9
3	911,7	2,6	2735,0	4,2	1367,5	3,6	911,7	3,3	683,7	3,2
4	682,0	6,2	2337*	8,5	1363,9	8,5	909,3	7,9	682,0	7,5
5	544,2	12,2	1921,3	13,7	1320*	16,0	906,9	15,4	680,2	14,7
6	452,3	21,0	1594,6	19,8	1160*	24,5	797,3	23,5	664,4	24,9
7	386,7	33,4	1360,2	27,0	1020,2	34,3	680,1	32,0	566,8	33,9
8	295,9	43,9	1183,6	35,4	887,7	44,9	591,8	41,8	493,2	44,3
9	232,3	55,6	1045,4	44,9	784,0	56,8	522,7	52,9	435,6	56,0
10	186,8	68,7	934,1	55,5	700,6	70,2	467,1	65,4	389,2	69,2
11	153,2	83,2	842,5	67,4	631,9	85,0	421,2	79,3	351,0	83,8
12	127,6	99,1	765,5	80,4	574,1	101,2	382,7	94,5	319,0	99,9
13	107,7	116,5	699,8	94,7	524,9	118,9	349,9	111,0	291,6	117,3
14	91,9	135,2	643,0	110,3	482,3	138,0	321,5	129,0	267,9	136,2
15	79,1	155,4	593,3	127,1	445,0	158,5	296,7	148,3	247,2	156,5
16	68,7	177,0	549,4	145,2	412,0	180,5	274,7	169,1	228,9	178,3
17	60,0	200,1	510,2	164,7	382,7	204,0	255,1	191,3	212,6	201,5
18	52,8	224,6	475,0	185,5	356,3	229,0	237,5	214,9	197,9	226,2
19	46,6	250,7	443,1	207,8	332,3	255,4	221,6	239,9	184,6	252,4
20	41,4	278,2	414,1	231,4	310,6	283,4	207,0	266,5	172,5	280,1
21	36,9	307,2	387,5	256,5	290,6	312,8	193,7	294,5	161,4	309,2
22	33,0	337,7	363,0	283,2	272,2	343,8	181,5	324,1	151,2	339,9

High values of distributed loads are idealized. Loads must be applied to knot points!

* limited by interaction of shear and moment at the connection

Displacement connection is decisive!